












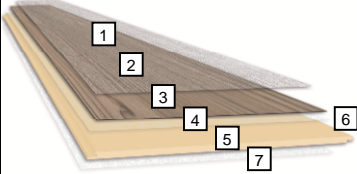










# TECHNICAL CHARACTERISTICS

<b>PURLINE Organic Flooring   wineo 1000</b> Permanently elastic polyurethane flooring – free of chlorine, solvents and plasticizers				
 <b>to click</b>	<b>wineo 1000</b> wood	<b>wineo 1000</b> stone		
<b>Format</b>	1295 x 195 mm	859 x 397 mm		
<b>Product thickness</b>	5 mm	5 mm		
<b>Weight</b>	9 kg/m <sup>2</sup>	9 kg/m <sup>2</sup>		
<b>Planks / m<sup>2</sup> per box</b>	8 / 2.02 m <sup>2</sup>	6 / 2.05 m <sup>2</sup>		
<b>Boxes/ m<sup>2</sup> per pallet</b>	48 / 96.96 m <sup>2</sup>	48 / 98.40 m <sup>2</sup>		
<b>Classification</b>				
 <b>Utilization class 23</b> Heavy-duty use in the domestic area EN ISO 10874	Corridors, living rooms, kitchens, home offices	1	<b>Surface texture</b> various embossings	
 <b>Utilization class 32</b> Normal use in the commercial sector EN ISO 10874	Offices, boutiques, cafés	2	<b>Top layer</b> Polyurethane	
 Wear resistance EN 660-2	Group T	3	<b>Decor</b> Decor paper	
 Reaction to fire EN 13501-1	C <sub>fl</sub> - s1	4	<b>Stabilisation</b> Glass fibre reinforcement	
 <b>R9</b> Anti slip category DIN 51130	R 9	5	<b>Base layer</b> Polyurethane	
 Slip resistance EN 13893	μ ≥ 0.30 – DS	6	<b>Profile connection</b> Connect technology 	
 Anti-static properties EN 1815	≤ 2 kV	7	<b>Backing</b> Glass fibre reinforcement	
 Staining and chemical resistance EN ISO 26987	Very good resistance according to the concentration and residence time	 windmüller flooring products WFP GmbH Nord-West-Ring 21 D-32832 Augustdorf - 16 - <b>Polyurethan Bodenbelag</b> DOP: 2001001 EN 14041:2004 1658   Elastischer Bodenbelag zur Verwendung in Innenräumen.		
 Light fastness EN ISO 105-B02	≥ 7			
 Residual indentation EN ISO 24343-1	~ 0.05 mm			
 Effect of a furniture leg EN 424	Foot type 0 – no visible damage			
 Castor chair test EN 425 / ISO 4918	Type W – no visible change			
 Thermal resistance ISO 8302	0.01 (m <sup>2</sup> K)/W			
 Impact sound reduction EN ISO 10140	~ 6 dB			
 Dimension stability EN ISO 23999	~ 0.10 %			

**Relevant Information:**

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by windmüller flooring products WFP GmbH.