





Winchester LLP97

## The Project

Winchester | LLP97 | 800m<sup>2</sup>

Miraflores de la Sierra

Madrid

Wedding | Conference Venue

Large commercial space



### Quick and easy to install

Schnell und einfach zu installieren  
Pose facile et rapide  
Snel en eenvoudig te installeren



### Acoustic qualities (13dB)

Trittschall reduzierend (13dB)  
Qualités acoustiques (13dB)  
Akoestische eigenschappen (13dB)



### Individually replaceable

Einzel austauschbar  
Individuellement remplaçable  
Individueel te vervangen



### Suitable for <95% RH

Geeignet für <95% Luftfeuchtigkeit  
Pose avec taux d'humidité relative <95%  
Geschikt voor <95% luchtvochtigheid



### Durable

Strapazierfähig  
Durable  
Duurzaam



### Comfortable underfoot

Angenehmes Gehgefühl  
Confortable sous le pied  
Voelt comfortabel aan



### Low maintenance

Pflegeleicht  
Entretien facile  
Weinig onderhoud



### Waterproof

Wasserbeständig  
Étanche  
Waterbestendig



### Realistic designs

Realistische Designs  
Décors réalistes  
Realistische designs



### 100% recyclable

100% wiederverwertbar  
100% recyclable  
100% recyclebaar



### Compatible with underfloor heating (up to 27°C)

Für Fußbodenheizungen geeignet (bis 27°C)  
Compatibles avec le chauffage au sol (jusqu'à 27°C)  
Geschikt voor vloerverwarming (tot 27°C)






Before



After

## Construction

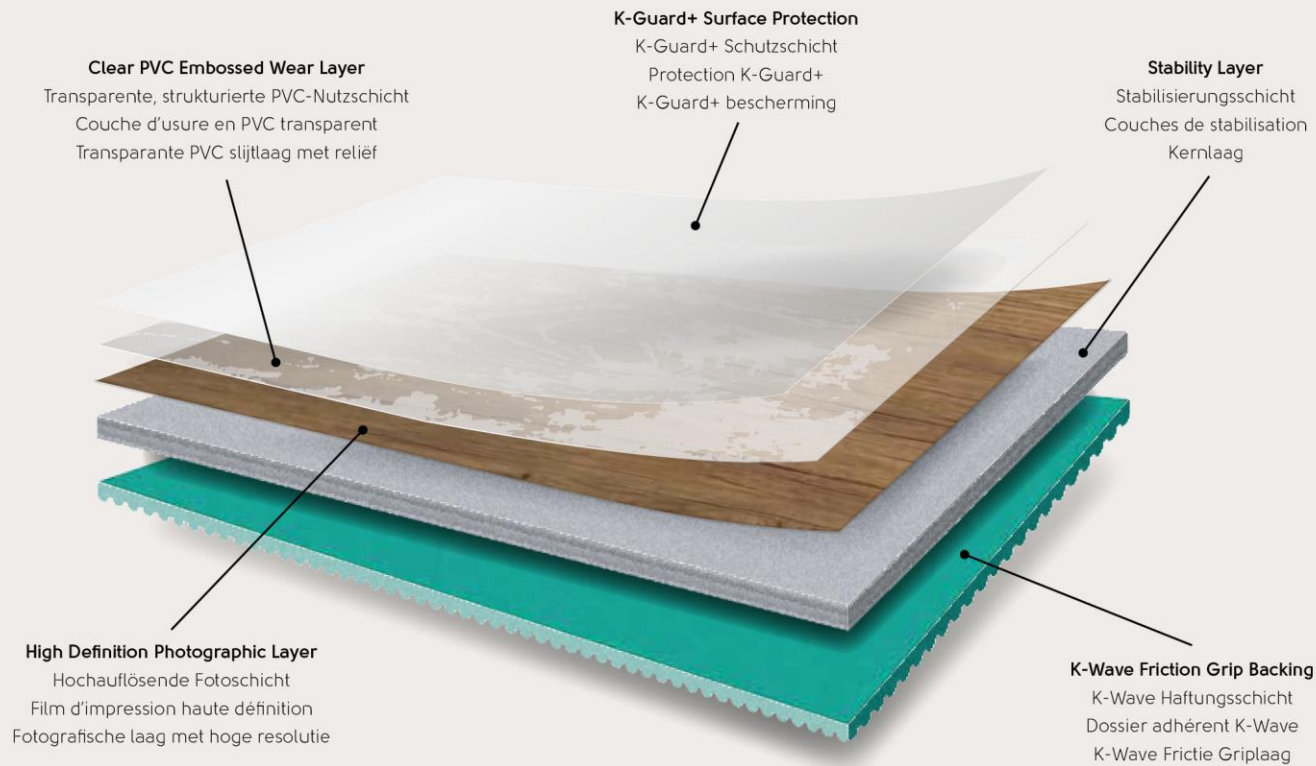

## LooseLay

**Thickness:** 4,5mm

**Wear Layer:** 0,55mm

**Bevel:** no

**Guarantee**

Light industrial – 10 years  
Commercial – 12 years  
Domestic – 30 years

**Slip Resistance/Result:**

DIN 51130 – R10  
DIN 51097 – Plank B,  
EN 13893 – DS

Accommodates 30 – 600 people  
Large commercial space


Designflooring  
LooseLay





Laid on raised access floors.



			DIN 51130	DIN 51097	Box Quantity	Acoustic
4,5mm	0,55mm	✗	R10	B	12 planks/3,15m <sup>2</sup>	ΔLw = 13 dB

	Standard	Result	Product	Size (mm)	Slip Resistance DIN 51097
<b>Size</b>	EN ISO 24342	See separate table	LLP92	1050,0 X 250,0	B
<b>Thickness</b>	EN ISO 24346	4,5 mm	LLP95	1050,0 X 250,0	B
<b>Wear layer</b>	EN ISO 24340	0,55 mm	LLP99	1050,0 X 250,0	B
<b>Surface treatment</b>		K-Guard+ PU coating	LLP101	1050,0 X 250,0	B
<b>Guarantee</b>	Light industrial	10 years*	LLP102	1050,0 X 250,0	B
	Commercial	12 years *	LLP106	1050,0 X 250,0	B
	Residential	30 years *	LLP108	1050,0 X 250,0	B
<b>Bevelled edge</b>		No	LLP109	1050,0 X 250,0	B
<b>Mass per unit area</b>	EN ISO 23997	7550 g/m <sup>2</sup>	LLP112	1050,0 X 250,0	B
<b>Standards</b>	EN 649/ EN ISO 10582	Heterogeneous PVC	LLP113	1050,0 X 250,0	B
<b>Classification</b>	EN 685/ EN ISO 10874- light industrial	42: Light industrial general	LLP142	1050,0 X 250,0	B
	EN 685/ EN ISO 10874- Commercial	33: Commercial heavy	LLP143	1050,0 X 250,0	B
	EN 685/ EN ISO 10874- Domestic	23: Domestic heavy	LLP144	1050,0 X 250,0	B
<b>Reaction to fire</b>	EN 13501-1	B <sub>4-s1</sub>	LLP145	1050,0 X 250,0	B
<b>Staining resistance</b>	EN 423	Class 0	LLP146	1050,0 X 250,0	B
<b>Light fastness</b>	EN ISO 105-B02	≥7	LLP147	1050,0 X 250,0	B
<b>Abrasion resistance</b>	EN 649	Group T	LLP148	1050,0 X 250,0	B
	EN ISO 10582	Type 1	LLP149	1050,0 X 250,0	B
<b>Flexibility</b>	EN ISO 24344	Pass	LLP150	1050,0 X 250,0	B
<b>Dimensional stability</b>	EN 434/ EN ISO 23999	≤ 0,10%	LLP151	1050,0 X 250,0	B
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 13 dB	LLT200	610,0 X 500,0	A
<b>Indentation - residual</b>	EN 433/ EN ISO 24343-1	Pass ≤ 0,1 mm	LLT201	610,0 X 500,0	A
<b>Castor chair continuous use</b>	EN 425/ ISO 4918	Pass	LLT202	610,0 X 500,0	A
<b>Thermal resistance</b>	ISO 8302	0,0245 m <sup>2</sup> K/W	LLT203	610,0 X 500,0	A
		Suitable for underfloor heating. Max 27° C	LLT208	610,0 X 500,0	A
<b>**Slip resistance</b>	DIN 51130	R10	LLT209	610,0 X 500,0	A
	DIN 51097	See separate table.	LLT210	610,0 X 500,0	A
	EN 13893	DS	LLT211	610,0 X 500,0	A
<b>Adhesive</b>		Most applications will not require the use of adhesives. However, we recommend the use of a tackifier for heavy traffic areas.			
<b>Recycling</b>		Suitable			
<b>VOC emission</b>	French VOC regulation (ISO 16000)	A+			

\*subject to terms see website

\*\*Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained

Designflooring SAS - T: 01 57 32 39 13 | F: 01 57 32 39 14  
 Designflooring GmbH - T: 0211 469 59203 | F: 0211 469 59204  
 Designflooring Nederland - T: 020 200 8282 | F: 020 200 8386  
 e: info@designflooring.com  
 www.designflooring.com



Manufactured to ISO9001

